

# SOLID AXLE ORDER FORM



Name: \_\_\_\_\_

Company Name: \_\_\_\_\_

Phone Number: \_\_\_\_\_

P.O. Number: \_\_\_\_\_



Date: \_\_\_\_\_

Sales Rep: \_\_\_\_\_

(For use by Trailer Parts Wholesale)

**Axle Capacity:**

- 2k   
  3.5k   
  5.2k/6k   
  7k   
  8k   
  10k   
  12k   
  15k or larger (please call)

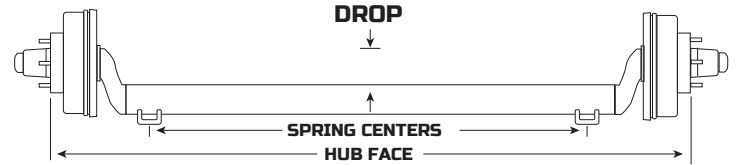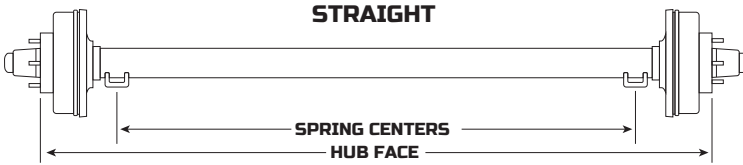

**Spindle Type:**

- Straight   
  4" Drop

**Hub Face:**

Measurement: \_\_\_\_\_

**Stud Size:**

- 1/2"   
  9/16"   
  5/8"

- Axle Painted (additional charge)

**Axle Seats:**

- Loose  
 Welded  
      Spring Over Axle  
      Spring Under Axle

Spring Center Measurement: \_\_\_\_\_

**Axle End Options:**

- Bare Beam  
 Idler Hub  
 Hub/Drum  
      Electric Brakes  
      Hydraulic Brakes  
      Hydraulic Disc Brakes  
      Economy  
      Heavy-duty

**Minimum Distance From Hub Face To Spring Center:**

Capacity	Type	Both Sides
2K	Straight	8-3/4"
3.5-4.4K	Straight	11-1/4"
	Drop	12-1/2"
5.2-7K	Straight	13-3/4"
	Drop	15-3/4"
8K	Straight	15-7/8"
10K	Straight	26"
12K	Straight	27-7/8"

**Lug Pattern:**

**4-Lug**



Measured: Center to Center

- 4"

**5-Lug**



Measured: Center to Edge

- 4 1/2"     5"  
 4 3/4"     5 1/2"

**6-Lug**



Measured: Center to Center

- 5 1/2"

**8-Lug**



Measured: Center to Center

- 6 1/2" (1/2" Studs)  
 6 1/2" (9/16" Studs)  
 6 1/2" (5/8" Studs)

For example, on a 3.5k axle with a 94" hub face measurement, the axle can have a maximum spring center of 82-3/4". For a 5.2k or 7k axle with a 94" hub face measurement, the axle can have a maximum spring center of 80-1/4".

Notes: \_\_\_\_\_

\_\_\_\_\_

Quantity: \_\_\_\_\_

Customer Signature\* (Required): \_\_\_\_\_

\*By signing, I verify that the axle(s) indicated above are correct, and acknowledge that all special order axles are non-refundable and may require a deposit.